

IP65 LED Bulkhead and Exit Sign Luminaire

Axiom

The **Axiom** LED bulkhead utilises an IP65 rated polycarbonate base and fresnel lens housing 16 high output white LEDs and constant current maintained drive circuit. The luminaire provides 135 Lumens and the lens generates a wide intensity distribution ideal for providing good illuminance on the escape route. The polycarbonate lens can be fitted with 100mm high, self-adhesive safety signs. A deep (150mm) opal diffuser is also available to provide double sided signage if required.

OPERATION

The **Axiom** LED bulkhead luminaires are available for normal mains lighting or with integral Maintained emergency lighting control gear (non-maintained operation achieved by excluding a switched live supply).


The 16 white LEDs provide 135 Lumens and M3 versions also offer 3 hour emergency lighting duration from integral Nickel Cadmium (NiCd) batteries. As with all ELP maintained luminaires the AX/M3 maintained units can be used for standard switched mains lighting but will automatically provide emergency lighting in the event of a complete loss of normal mains supply.

The benefits of the modern white low power LEDs include long life (typically 50,000hours+), excellent energy efficiency (>100lm/W), low operating temperatures therefore improving the life of the internal batteries and good operation at low ambient temperatures.

The luminaires fully comply with the requirements of EN60598.2.22 and their low energy consumption assists with compliance with Part L requirements.

DALI/Self-Test Options:

The **Axiom** LED luminaires can be specified with integral DALI/Self-Test gear providing automatic Self-Test in accordance with BSEN62034 or fully interoperable DALI operation when connected to a DALI control system.

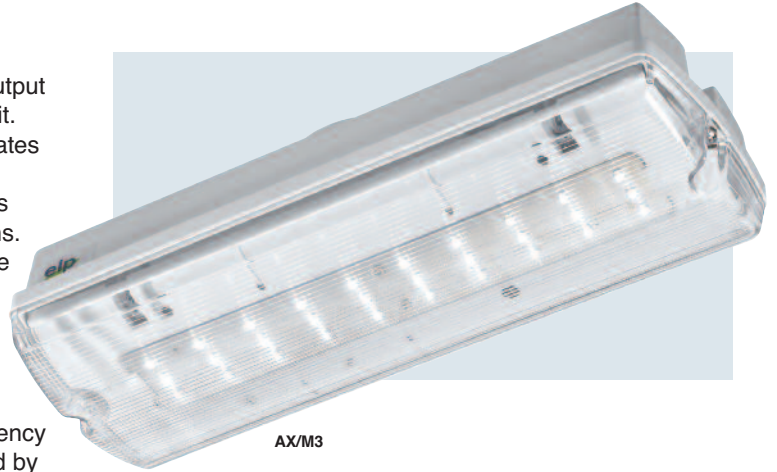

AX/M3




AX/M3/DDS/ECAD




GENERAL DETAILS

Product	LED Bulkhead and Exit Sign
Light source	16 x white LEDs (CRI>80)
Luminaire Lumens	135lm (max. without sign legend)
Sign viewing distance	32m (DDS versions)
Construction	White polycarbonate base and clear fresnel lens
Geartray	Hinged white plastic
Dimensions	350mm (L) x 120mm (W) x 90mm (H)
Cable entry	20mm drilling points

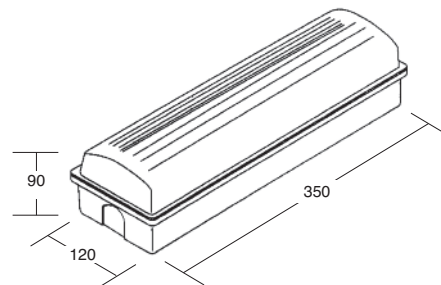

All details and specifications shown in this document are deemed correct at time of publication. The right to modify equipment, change specifications and instructions without notice, is reserved as part of the Emergency Lighting Products Limited policy of continuous development and improvement. We endeavour to keep all our customers informed of any alterations as and when they occur.



IP65 LED Bulkhead and Exit Sign Luminaire

SPECIFICATION

	Maintained	Mains only
Light source	16 x white LEDs	
Colour temperature	4000 to 5000K	
Luminaire lumens (mains)	135lm	135lm
Lumens (emergency)	135lm	—
IP rating	IP65	
Ambient temperature (Ta)	25°C	
Insulation class	Class II	
Supply voltage	230V ~ 50Hz	
Supply power	2.4W	2.4W
Charge power (typical)	1.7W	—
Battery	1 x 3.6V 1.5Ah NiCd	—
Weight	1.1kg	0.9kg

AXIOM – Emergency Lighting Spacings

Mounting height Hm (m)	Trans. to wall	Trans. to trans.	Axial to trans.	Axial to axial	Axial to wall	
2.5	1.6	5.9	4.3	3.0	1.0	1 Lux min. at centre
4.0	1.1	4.7	3.6	2.6	0.4	
2.5	2.6	8.7	7.2	4.7	1.2	0.5 Lux min. (open)
4.0	1.9	8.5	7.0	4.5	0.6	

ORDER CODES

ORDER CODES	Description
AX/M3	Maintained emergency LED bulkhead luminaire
AX/230	Mains only LED bulkhead luminaire
OPTIONS:	/DALI DALI or Self-Test emergency operation /DDS Deep Double Sided exit sign diffuser /EBAX/RB/KIT Semi-recessing bezel kit
DDS LEGENDS:	/DDS/ECAR EC format – Arrow Right/Left (for DDS) /DDS/ECAD EC format – Arrow Down (for DDS) /DDS/ISOAR ISO format – Arrow Right/Left (for DDS) /DDS/ISOAU ISO format – Arrow Up (for DDS)
SELF-ADHESIVE SIGN KITS:	/AX/LEG/KIT/EC EC format Self-adhesive kit /AX/LEG/ISOAR ISO format Self-adhesive kit – Arrow Right /AX/LEG/ISOAL ISO format Self-adhesive kit – Arrow Left /AX/LEG/ISOAU ISO format Self-adhesive kit – Arrow Up

Emergency Lighting Products Limited

Parbrook House, Gillmans Industrial Estate, Natts Lane Billingshurst, West Sussex RH14 9EZ

Telephone: +44 (0) 1403 786601 Fax: +44 (0) 1403 786602 e-mail:sales@elp.uk.com www.elp.uk.com

AXIOMDS-04-16

