

LED Exit Sign Luminaires

MetaLED

The **MetaLED** range provides excellent viewing distances of 36metres from a conventional package but with the advantage of using long life, low energy LEDs as a light source. The benefits of the modern white low power LEDs include long life (typically 50,000hours+), excellent energy efficiency(>100lm/W), low operating temperatures therefore improving the life of the internal batteries and good operation at low ambient temperatures.

MetaLED exit sign luminaires feature epoxy coated steel enclosures with screen printed opal polycarbonate legend panels enclosing integral rechargeable batteries and a PCB fitted with advanced wide angle white LEDs and efficient driver circuit.



MD/M3/WH/ECAD

OPERATION

The **MetaLED** range is supplied with Maintained operation as standard providing 3 hour duration from integral high temperature Nickel Cadmium (NiCd) batteries.

(Non-maintained operation is available by excluding a switched live supply). Pictogram legend panels complying with the Safety Signs Regulations are supplied as standard but ISO sign formats are also available to special order.

The luminaire fully complies to the requirements of EN60598.2.22 and offers bright and even luminance across the legend panel ensuring maximum visibility in the event of an emergency.


DALI/Self-Test Options:

The **MetaLED** LED luminaires can be specified with integral DALI/Self-Test gear providing automatic Self-Test in accordance with BSEN62034 or fully interoperable DALI operation when connected to a DALI control system.



GENERAL DETAILS

Product	LED Bulkhead and Exit Sign
Light source	16 x white LEDs
Luminaire Lumens	100lm (max. without sign legend)
Sign viewing distance	36m
Construction	Epoxy coated steel body with screen printed Polycarbonate legend panel
Geartray	Integral to base
Dimensions	385mm (L) x 1850mm (W) x 71mm (H)
Cable entry	20mm knock-outs

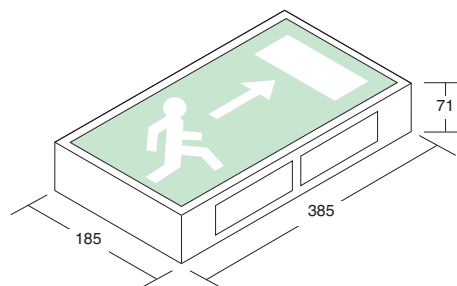

LED Exit Sign Luminaires

SPECIFICATION

	Maintained	Mains only
Light source	16 x white LEDs	
Colour temperature	4000 to 5000K	
Luminaire lumens (mains)	N/A	N/A
Lumens (emergency)	N/A	N/A
IP rating	IP20	
Ambient temperature (Ta)	25°C	
Insulation class	Class I	
Supply voltage	230V ~ 50Hz	
Supply power	4.2W	2.4W
Charge power (typical)	1.7W	—
Battery	1 x 3.6V 1.5Ah NiCd	—
Weight	1.6kg	1.4kg



MD/M3/WH/ISOAU

ORDER CODES

Description

MD/M3/WH	Maintained emergency LED exit sign luminaire
MD/230/WH	Mains only LED exit sign luminaire

NB: White as standard — other colours available to special order

LEGENDS:	/ECAR EC Format — Arrow Right
	/ECAL EC Format — Arrow Left
	/ECAD EC Format — Arrow Down
	/ISOAR ISO Format — Arrow Right
	/ISOAL ISO Format — Arrow Left
	/ISOAU ISO Format — Arrow Up

Emergency Lighting Products Limited

Parbrook House, Gillmans Industrial Estate, Natts Lane Billingshurst, West Sussex RH14 9EZ

Telephone: +44 (0) 1403 786601 Fax: +44 (0) 1403 786602 e-mail:sales@elp.uk.com www.elp.uk.com

METALEDDDS-04-16

